

VARIABLES


VAR_GLOBAL

```
Li0 AT %MX100.16 : BOOL; (* Ingresso 0 modulo CPU *)
Li1 AT %MX100.17 : BOOL; (* Ingresso 1 modulo CPU *)
Lo0 AT %MX100.32 : BOOL; (* Uscita 0 modulo CPU *)
Lo1 AT %MX100.33 : BOOL; (* Uscita 1 modulo CPU *)
END_VAR
```

	Project : PLCSlave	
	VARIABLES :	
	Release : PLCSlave	Ver :1.00
	Author :	Date:10/04/2012
	Note :	Page:1 of 1

```
VAR
CPUiOMng : CPUModuleIO;
dummy : BOOL;
END_VAR
```

1

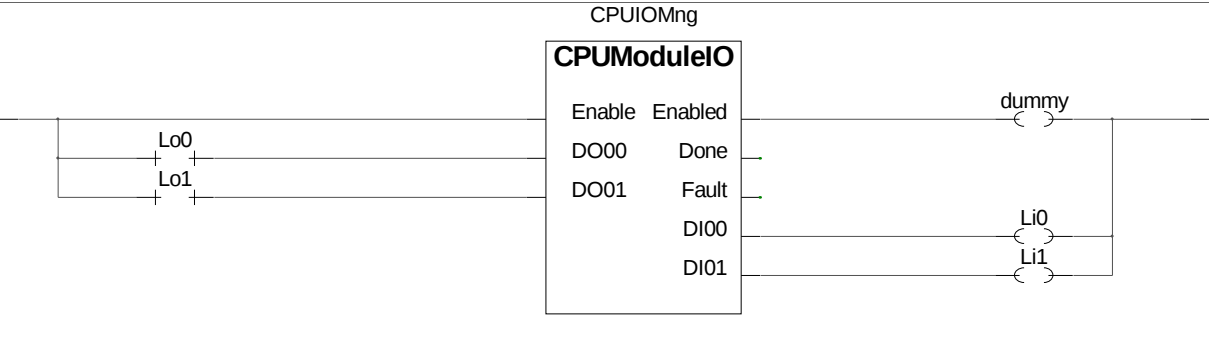

	Project : PLCSlave	
	PROGRAM : CPUIO	
	Release : PLCSlave	Ver :1.00
	Author :	Date:10/04/2012
	Note :	Page:1 of 1

FUNCTION_BLOCK CPUModuleIO

(SFR054B000) Manages the logic I/O on the CPU module
 ENCRYPTED CODE

```
VAR_INPUT
Enable : BOOL; (* Function enable *)
DO00 : BOOL; (* Digital output 0 *)
DO01 : BOOL; (* Digital output 1 *)
END_VAR

VAR_OUTPUT
Enabled : BOOL; (* Function enabled *)
Done : BOOL; (* Function done *)
Fault : BOOL; (* Function fault *)
DI00 : BOOL; (* Digital input 0 *)
DI01 : BOOL; (* Digital input 0 *)
END_VAR
```

1

	Project : PLCSlave	
	FUNCTION BLOCK : CPUModuleIO	
	Release : PLCSlave	Ver :1.00
	Author :	Date:10/04/2012
	Note :	Page:1 of 1